

diatron●●

Abacus Vet5

5-PART WBC DIFFERENTIAL
VETERINARY ANALYZER



ANALYZER OVERVIEW

For more than 30 years Diatron develops and manufactures hematology analyzers for the human clinical market. This expertise also enables Diatron to offer veterinary analyzers for exclusive use in the animal healthcare field.

The Abacus Vet5 features a large touch screen and an intuitive user interface to provide an optimal solution for veterinary clinics and practices which require a high quality hematology analyzer.

BENEFITS AND KEY FEATURES

EASY TO USE

- Its large touch screen, and user-friendly interface allow accurate data entry, monitoring of results and histograms enabling fast and efficient operation. Results can be retrieved via an on-board or an external printer. The system can connect to a Laboratory Information System (LIS) using the HL7 communication protocol.

CONVENIENT

- Its compact size and associated reagent pack mean that the system requires only a small space and storage and shipping of reagents is simple.

RELIABLE AND EFFICIENT

- Each Abacus Vet5 analyzer is almost maintenance-free resulting in minimal downtime and can store up to 5000 results.

HIGH PERFORMANCE


- The Abacus Vet5 offers 5-part differential WBC results on Dog, Cat, Cattle, Horse and 3-part differential WBC results on Mouse, Rat, Rabbit, Ferret, Sheep, Goat, Pig, Guinea Pig and Primates.

Abacus Vet5

DIATRON REAGENTS

Our company is ISO 13485 and ISO 9001 certified, and our reagent manufacturing plant is designed to ensure the highest quality standards. Each lot of reagent manufactured is fully controlled prior to release. Our Diatro•Lyse-Vet is cyanide free.

Diatron reagents offer a shelf life of up to 24 months before opening. The use of the hardware key ensures that only Diatron reagents can be used thus ensuring the best performance and quality of results.

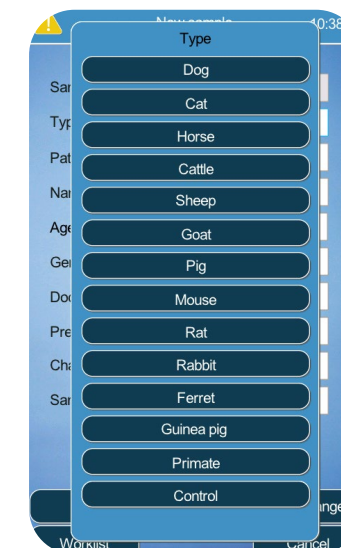

SPECIFICATIONS

SAMPLES

- Throughput: Up to 25 samples/hour
- Parameters: 24 hematology parameters, including 5-part WBC differential: WBC, LYM, MON, NEU, EOS, BAS, LYM%, MON%, NEU%, EOS%, BAS%, RBC, HCT, MCV, RDW_{cv}, RDW_{sd}, HGB, MCH, MCHC, PLT, PCT, MPV, PDW_{cv} and PDW_{sd}

TECHNOLOGY

- Volumetric Impedance measurement
- Light absorbance measurement for HGB
- Sample volume: 25/50 µl of whole blood in 3/5 part mode
- Sampling method: Open tube system

SAMPLE PROFILES

- Five-part mode: Dog, cat, horse and cattle
- Three-part mode: Mouse, rat, rabbit, ferret, pig, sheep, goat, guinea pig and primates

REAGENTS

- Reagent pack containing Diluent Vet (10L), Lyse Vet (0.3L), Diff Vet5 (0.8L), Cleaner (0.3L) and Rinse Vet (0.5L)
- Diatron•Vet5 Reagent Pack: Up to 200 measurements*
- Hardware key protected pack

USER INTERFACE

- Easy-to-use, menu driven user interface
- Screen type: Capacitive 8" (173 x 104 mm), LED backlit, color graphics LCD
- Data storage capacity: Up to 5000 results, including histograms

- Printer options: Built in thermal printer (58 mm wide paper)
- LJ charts: Trend function allows to display with a Levey-Jennings chart the selected records from the database
- Screen resolution: 480 x 800
- User language: English, French, German, Spanish, Italian, Czech, Polish, Russian, Chinese

COMMUNICATION PROTOCOL

- ASCII-based communication protocol only
- HL7 communication

TECHNICAL FEATURES

- Cleaning functions: Automatic Self Clean, Clean Washhead, Drain Chamber, Hard Cleaning, 5 Cycle Clean, Bleaching
- Export function: 3 level export type: Simple, Advanced, Extended
- Optional barcode reader for sample ID and QC Data upload

PHYSICAL PARAMETERS

- Size (Width x Depth x Height)
32 cm x 28 cm x 37 cm
12" x 11" x 15"
- Weight: 13 kg, 29 lbs
- Power supply: 100-240 V AC, 12 V DC

COMMUNICATION INTERFACE

- LAN
- USB

* Please note this is the maximum number of measurement credits achievable, and varies on a number of factors

Analyzer

Cat. No	Description
AV5	Abacus Vet5

Cat. No.	Product name	Pack size
DRP02HK	Diatron•Vet5 reagent pack	piece

diatron●●

We are a member of the STRATEC Group | www.diatron.com | sales@diatron.com

The herein provided information and specifications by DIATRON are provided on an "as-is" basis and may be subject to changes, omissions and errors. DIATRON shall have no liability for the accuracy and completeness of these information and specifications and cannot be held liable for any representations or warranties, expressed or implied, and any third party claims or losses of any damages thereof. DIATRON reserves the right to make any changes to the information and specifications at any time and without notice. The applications and products herein may not be available in all markets | Nr.:AV5V9